



COLMEC S.p.A.

EXTRUSION LINES FOR HOSES

HIGH PRESSURE RUBBER HOSES

- ▶ Extruded on mandrels
- ▶ Braided reinforcement
- ▶ Internal diameters: 1/4" to 1 1/4"
- ▶ Working pressure: 50 to 350 bar

POWER STEERING HOSES


- ▶ Pressurised type
- ▶ Return type

BRAKE HOSES

- ▶ Extruded on flexible mandrel
- ▶ Extruded on rigid mandrel

AIR CONDITIONING HOSES

- ▶ Veener type
- ▶ Barrier type

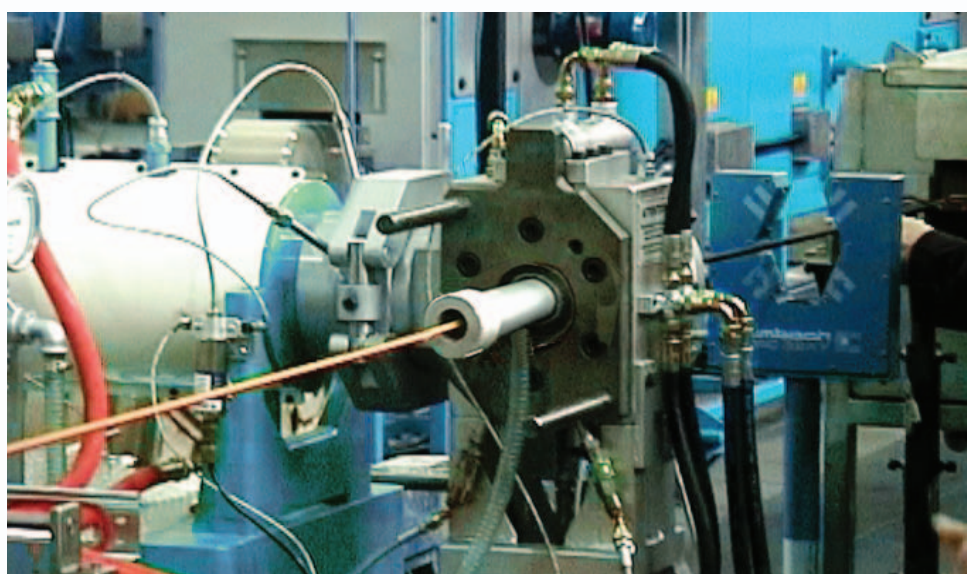



LOW PRESSURE RUBBER HOSES

- ▣ Crude oil, water and steam
- ▣ Air and welding
- ▣ Spiral reinforcement
- ▣ Internal diameters: 1/4" to 1 1/4"
- ▣ Working pressure: 10 to 35 bar





COOLANT HOSES TURBO CHARGER HOSES

- ▣ Knitted reinforcement
- ▣ Internal diameters: up to 150 mm

FUEL LINE HOSES

- ▣ Co-extruded type
- ▣ With fluoroplastic barrier
- ▣ Fuel filler hoses

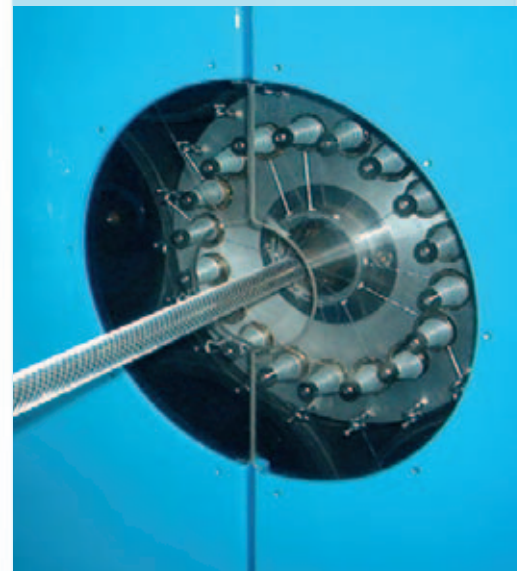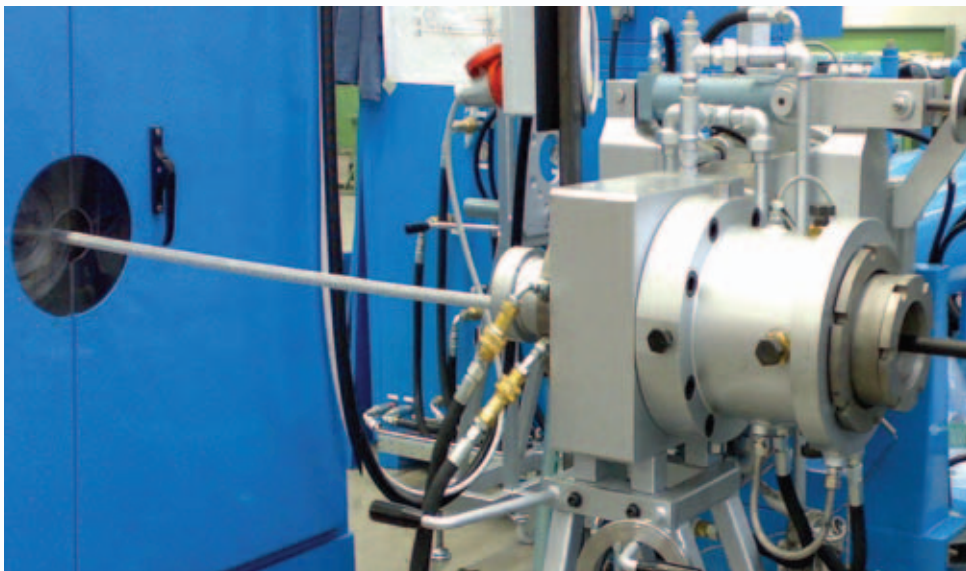

 **COLMEC** S.p.A.

Zona Industriale Sud-Ovest - Via Massari Marzoli,6 - 21052 Busto Arsizio (VA) Italy
tel.+39 0331 342551 - fax +39 0331 342559 - e-mail: colmec@colmec.it
www.colmec.it